

"DROP LEG" AUTOMATIC DRAIN




SPECIFICATIONS

	A200	A400	A800
Maximum Supply Pressure	220 psi		
Maximum Operating Pressure	145 psi		
Ambient & Media Temperature	40°F - 140°F (5°C - 60°C)		
Pressure Range	25 - 145 psi	15 - 150 psi	
Enter Size	1/4" NPT	3/8" NPT	1/2" NPT
Drain Port	1/8" NPT	Pipe inner diameter (.236)	
Drain Type	N.O.		
Manual Drain	Without	With	

Standard with Metal Bowl Guard


DIMENSIONAL DATA

Units: mm (inch)

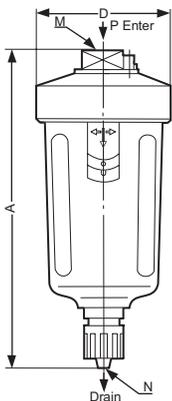

Model	A	D	MC	NC
A200	158.0 (6.22)	55.1 (2.17)	1/4" NPT	1/8" NPT
A400	169.9 (6.69)	71.9 (2.83)	3/8" NPT	6mm (Pipe inner dia.)
A800	169.9 (6.69)	71.9 (2.83)	1/2" NPT	6mm (PU)

PARTS BREAKDOWN

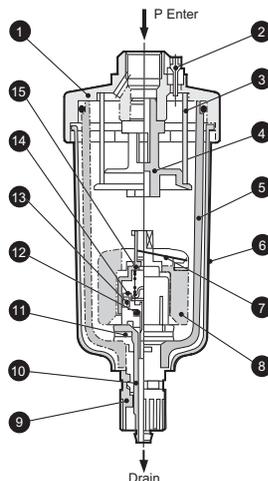

- Reliable maintenance free operation
- Fine stainless wire mesh inlet strainer with large surface area removes contaminants
- Internal strainer can be cleaned and reused
- All internal components are corrosion resistant materials
- Bayonet locking device permits quick "tool free" disassembly
- Long and trouble free service life

No.	Component	Material
1	Body	Aluminum Die Casting
2	Relief Needle	Brass
3	Strainer	Stainless Steel Wire Mesh
4	Strainer Seat	POM
5	Bowl Assembly	Polycarbonate
6	Bowl Guard	Cold Rolled Plate
7	Lever	Stainless Steel
8	Float	Formed PU
9	Drain Knob	POM
10	Drain Pipe	POM
11	Seal	Rubber-Plastic Composite
12	O-Ring	Buna-N
13	V-Ring	Buna-N
14	Piston	POM
15	Float Seat	POM

ORDERING INFORMATION

A - 400

Code	Description
A	Auto-Drain

Model	Port Size
200	1/4"
400	3/8"
800	1/2"

All auto-drains must ship pre-installed in bowls.